

FCTL MANUAL

FCTL (FlexiSPY Control) is an application that runs on any java enabled mobile. FCTL lets you control the FlexiSPY phone without having to worry about complex SMS commands. SIMPLY SELECT THE FUNCTION YOU WANT and FCTL will send the command for you. With FCTL you can control your FlexiSPY using another mobile.

REQUIREMENTS:

- J2ME mobile phone

To [download FCTL](#), enter djp.cc/fctl.jad in the mobile phone's web browser. After the download is complete, the application will be automatically installed.

DEFINITIONS

TARGET PHONE: THE PHONE THAT HAS FLEXISPY INSTALLED

MONITOR PHONE: THE PHONE FROM WHICH YOU WANT TO MAKE SPY CALLS (PRO VERSION ONLY)

FCTL PHONE: The device running the FCTL software. This does not need to be the monitor phone.


Important Note

On the first start of the application, FCTL will ask you to enter

1. TARGET Phone Number. This is the phone number of the phone that FlexiSPY is installed on.
2. The FlexiKEY for the TARGET phone

To verify the TARGET Number and FlexiKEY, go to Change FlexiKEY & Phone No and make sure all the numbers are correctly input.

Click here to verify or enter a new TARGET number and FlexiKEY.

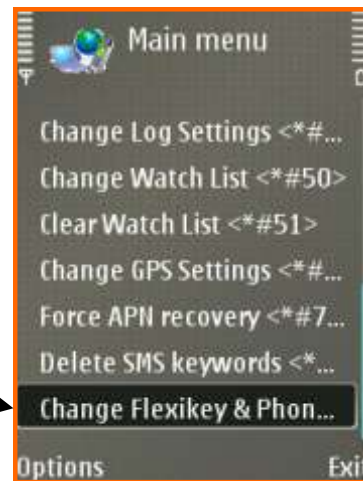


Here, you can input the TARGET Phone Number.

It always need to be International number, you can enter + sign and the Country Code and Phone Number without 0 leading. For example, the country is 66 and the phone number is 012345678 so the number to input is +6612345678

Here, input the FlexiKEY for the TARGET phone

If you change the number here, don't forget to press **SAVE** before you exit this Setting.

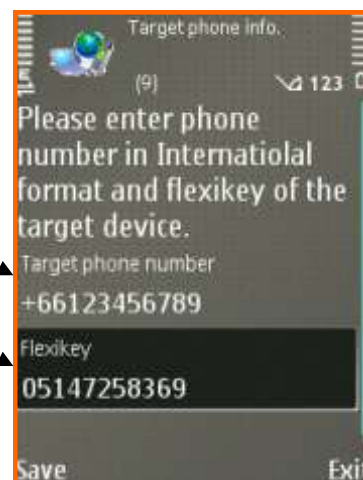

Important Note

Before sending the Command to the TARGET Phone, please make sure the command you want to send is available on the version of FlexiSPY installed on the TARGET Phone.

SOME COMMANDS ARE NOT AVAILABLE ON EARLIER VERSIONS OF FLEXISPY

Send SMS to enable Spy Call

A SPY CALL is a call you make from the MONITOR phone to the TARGET phone to listen to its surroundings or to patch into the existing call. To remotely Enable Spy Call, click on the first Option.



And enter the MONITOR phone number here.

After the command is sent it will change FlexiSPY to the following setting:

Enable : YES
Number : Number user enters in this screen

Note:

For how to set international numbers please refer to [FlexiSPY Manual](http://www.flexispy.com/manual.htm) <http://www.flexispy.com/manual.htm>



Disable Spy Call

This command instructs the TARGET phone to Disable Spy Call. After this command is sent it will change the setting of FlexiSPY to:

Enable : NO



Start Capture Current Events

This command instructs the TARGET phone to Start Capture of the currently selected events. After this command is sent it will change the setting of FlexiSPY to:

Start Capture : YES



Stop Capture All Events

This command is used to send to the TARGET phone to Stop Capture all events. After this command is sent it will change the setting of FlexiSPY to:
 Start Capture : NO



Remotely Restart TARGET Phone

This command instructs the TARGET phone to Restart the Phone. This command is used when you want to restart the TARGET Phone remotely.



Check current Setting of FlexiSPY

This command sends the Diagnostic Information to the phone with FCLT installed.

After this command is sent, the TARGET phone will secretly send SMS back to the sender with detailed information about FlexiSPY; such as Current Settings, Database Information, and current Spy (Monitor) Number.




Send all captured events immediately to server

This command instructs the TARGET phone to immediately send all captured events to the server.



Change the Settings of FlexiSPY


This command is used to change the Events being Captured on the TARGET phone. After this command is sent, the Settings of FlexiSPY on the TARGET will change according the selections of the screenshot below:

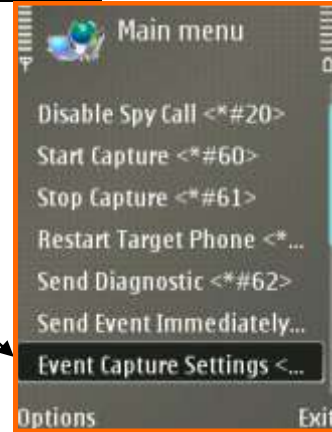

Change the TARGET Phone Log Setting to 30 days

For Symbian, if the user of the phone manually changes the Phone Log setting, then FlexiSPY cannot capture phone events. If you are receiving SMS but no phone call Events, use this command to secretly change the Log setting.

Use this command to Change the TARGET Phone Log Setting to 30 days.

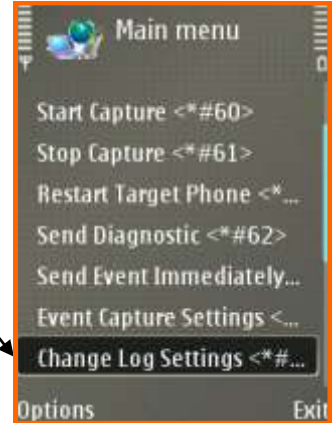


This screenshot is the screen on the TARGET Phone.

If the Phone Log is set to No Log, FlexiSPY will NOT capture any voice events. To capture voice events, Phone Log must not be No Log.


Disable/ Enable only number in List/ Enable all/ Add New Phone Number to Watch

This command is used to change the setting for watch list like Enable, Enable only number in List, Enable for all Number, or Add New number to Watch List. User can Select one of the option below to change the setting of Watch List

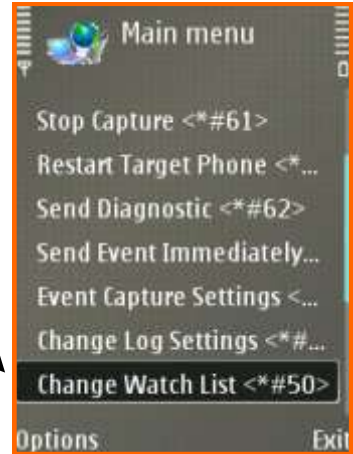


Clear the Number in the Watch List

This command is used to clear all the number in the Watch List

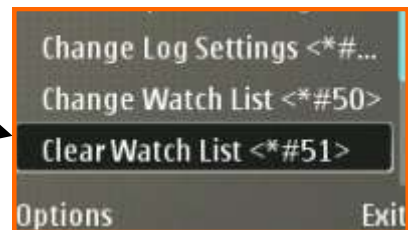


Force APN recovery

For Symbian, This command is used to instruct the application to create new Access Points and test them in case the Access Points on the Phone is not working.

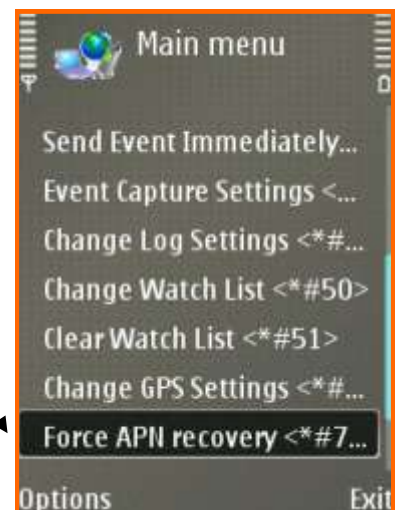

Enable/Disable or Change GPS Setting

This command is used to Enable/Disable the GPS (Global Positioning System) or it is used to change the Timer of the GPS event to get coordinate (longitude and latitude).

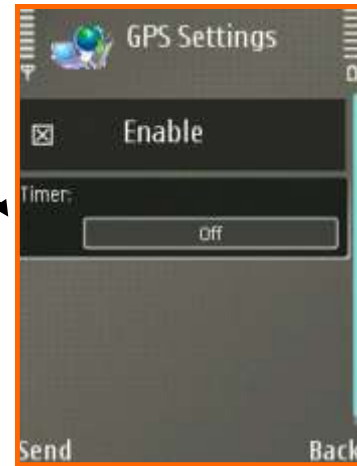

Delete SMS Keywords

This command is used to add/edit/clear the keyword for automatically delete the incoming SMS. When there are any incoming SMS that content this keyword (keyword1 or keyword2), that SMS will be automatically delete from the

