

BEFORE YOU BEGIN

- After your purchase, you will receive an email that contains the FlexiKEY.
- You will download the FlexiShield software from (<http://djp.cc>) directly into the phone.
- The TARGET phone MUST have GPRS correctly configured. Please contact your network operator if you are not sure.
- No computer or cables are required

DEFINITIONS

Below are some terms that are used in Flexishield application:

- FLEXISHIELD: Your FlexiShield software is downloaded from the internet (djp.cc) directly onto the TARGET phone
- FLEXI KEY: A license key required to activate FlexiShield (received after purchase)
- SHIELD: Shield is List of Phone numbers/SMS/MMS/e-mails that is used to collect incoming SMS, MMS, E-mail and incoming calls phone number and store them in the Flexishield Inbox
- BLACK: Black is the list that contains phone numbers that the user always wants to the call to be rejected from.
- White: White is the List that contains phone number that user always wants to allow the phone to ring when the call comes in.
- Address Book: Address Book is the list of phone numbers in the Contacts already stored on the phone.

INSTALL QUICK STEPS

Visit <http://www.flexispy.com/manual.htm> to view installation flash movies and the latest manuals

DOWNLOAD

1. Open web browser and go to <http://djp.cc>. Enter the license key (FlexiKEY) and select Download. The installation begins automatically after the download completed.
2. Select to allow Autostart or not.
 - If Autostart is not allowed, please go to Menu and find the icon of the application and open it.
 - If Autostart is allowed, the application screen will pop-up. If it does not pop-up, open the secret settings screen by pressing *#900900900#. If you make a mistake, please press Red Button (End Call Key) and start to enter it again.
3. Activate the product by entering your FlexiKEY & selecting Options/Activate.
4. Change the setting according to your need.

Note: To bring the application to foreground after activation success, you need to enter *#your flexikey#.

CONFIGURE

1. Add Phone Number/E-mail to List [Lists ->Shield/Black/White/Address Book -> Option ->Add]
2. Enable Shield [Mode -> Shield Mode -> Shield On/Shield On(private)/Shield Off]
3. Enable the other Lists using call management [Mode -> Call management Mode]
4. To view Call/SMS/MMS/E-mail that are shielded [Open Shield ->Call/SMS/MMS/E-mail]

FLEXISHIELD MANUAL

- This manual covers the usage of FlexiShield.
- FlexiShield works with all Symbian Series 60 3rd edition or higher

HOW IT WORKS

FLEXISHIELD: is an application that is used to protect any incoming SMS, Call Log, MMS, and E-mail from being seen by another people and store those events in its own database so that users can view them at any time they want. Flexishield can also be used to blacklist any phone number so that it will always get rejected when the call comes in.

DOWNLOADING THE FLEXI SHIELD INTO YOUR PHONE


IF YOU SEE A SECURITY WARNING WHEN DOWNLOADING, PLEASE CHANGE YOUR SETTINGS AS FOLLOWS

Main menu > Tools> Application manager> Settings> Online Certification > OFF


Or

Main menu > Tools> Manager> Settings> Online Certification Check > OFF

1. Open the Phones Web Browser.

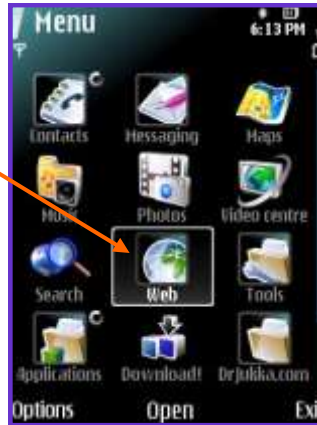

2. Enter www.djp.cc into the phones web browser and press Go To. This will open the webpage shown in step 3.

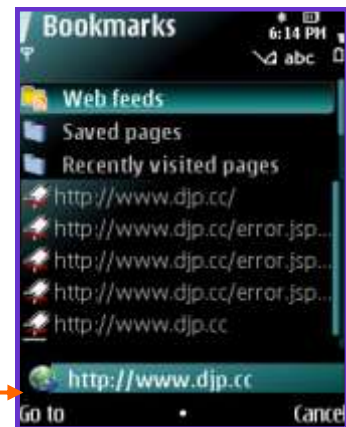

3. Enter your FlexiKEY, and press DOWNLOAD.



Installation will begin after download is completed.

4. After Installation complete.

You can start to activate now

ALLOW AUTOSTART

After installation completed, it will ask you to allow Autostart or not.

IT IS RECOMMENDED FOR MOST USER TO ALLOW AUTOSTART, DOING SO WILL ALWAYS GUARANTY THAT YOU DATA ARE BEING PROTECTED EVEN IF THE PHONE IS RESTARTED.

CHANGE MY PHONE TYPE

NEW CUSTOMERS DO NOT NEED TO USE THIS FEATURE.

DO NOT USE THIS WITH A POCKET-PC, SMARTPHONE OR WINDOWS MOBILE DEVICE.


This option is only for existing customers who need to change their phone from Symbian 8 to Symbian 9 or vice-versa. NOT for PPC or SmartPhone devices.

INSTALLING OR UPGRADING- ACTIVATING

After installing FlexiSHIELD it needs to be activated by entering the FlexiSHIELD setting screen. To access this screen you need to enter a code.

5. If Autostart is not allowed, please go to Menu and find the icon of the application and open it.


If Autostart is allowed, the application screen will pop-up. If it does not pop-up, open the secret settings screen by pressing *#900900900#. If you make a mistake, please press Red Button (End Call Key) and start to enter it again.

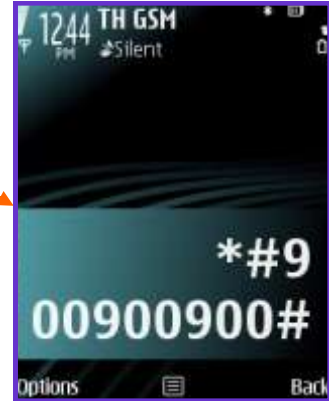

The FlexiShield Activation screen for new installations appears.

The software is must be activated with your FlexiKEY. This key is included in the email you received after purchase.

6. Enter your FlexiKEY and press ACTIVATE.

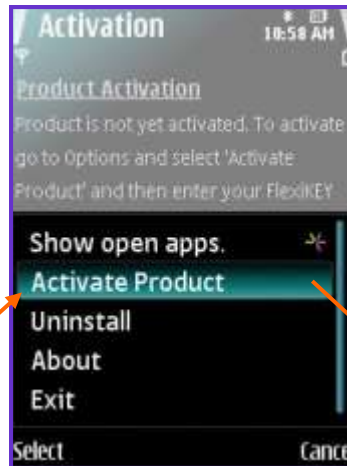

7. When you see the words Activation success, press OK.

If you don't see "Activation Success", please check that you have the correct FlexiKEY.



After activation of the software, the default code no longer works. The default code *#900900900# changes to your FlexiKEY.

Continued on next page

FLEXI SHIELD CONFIGURE SETTINGS

After Activation, Even if the application icon appears in the menu the user will not be able to access the application screen by opening the icon. User will need press *#Flexikey# respectively. The code will need to be entered correctly all at once. If you make any mistake, you need to press RED BUTTON (End Key) and start entering the code again.


SHIELD LIST

8. SHIELD List: is the list of phone numbers/e-mails addresses that user wants to be shielded to prevent from being seen by other people. All incoming/Outgoing Call, SMS, MMS and E-mail will be deleted from the telephone Logs/Inbox and be moved to SHIELD Inbox. For Incoming Call that has phone number in the Shield List will always be rejected when the Shield Setting is on.

8.1. ADD PHONE NUMBER/E-MAIL to Shield List go to:

Lists -> Shield and press

Option -> Add -> From Contacts/Number manually

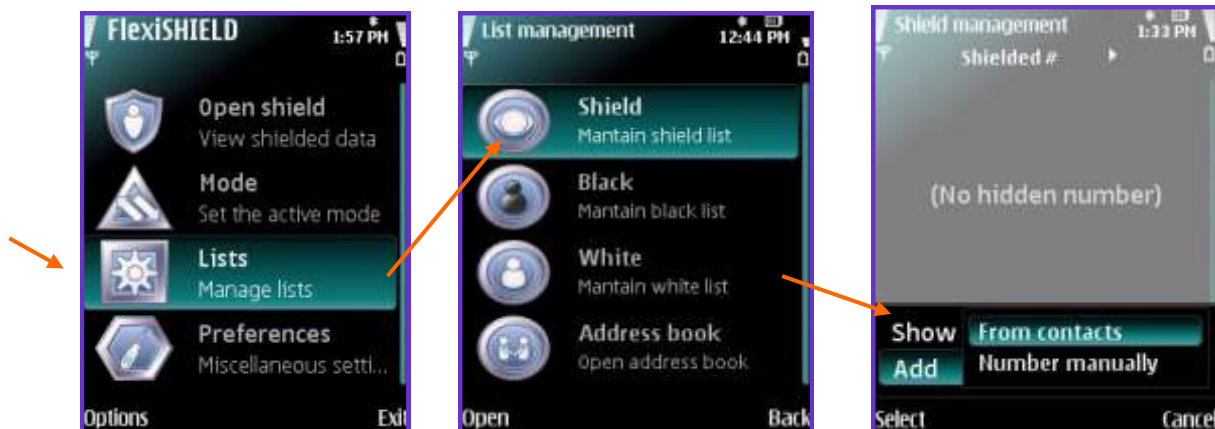

8.2. To ENABLE/DISABLE SHIELD go to:


Mode -> Shield Mode and select SHIELD ON/SHIELD ON(inc. Private)/SHIELD OFF



- SHIELD ON: is used to enable the Shield List so that any incoming/outgoing call, SMS, MMS, and E-mail in the Shield List are moved to Shield Inbox.
- SHIELD ON (inc. Private): has the same function as SHIELD ON and it also shield any incoming/outgoing call, SMS and MMS with Unknown or Private number.
- SHIELD OFF: is used to disable the shield.

8.3. To view Call, SMS, MMS, and E-mail that are shielded go to:

Open Shield -> Call/SMS/MMS/Mail (scroll left and right at the top of the screen)

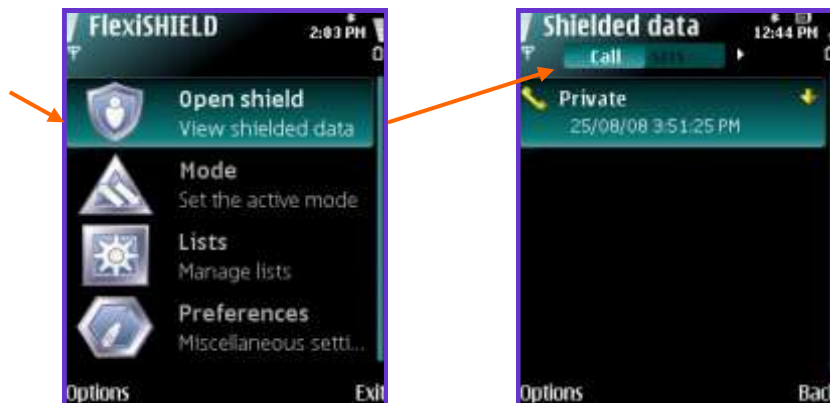


Note: For incoming Call, SHIELD List will override other list (E.g. Black, White, Address Book). So if SHIELD List is enable at the same time as the other List, the application will first check Shield List whether to reject or not before checking the other lists.

CALL MANAGEMENT: White

9. **WHITE:** is the list that used for call management only. When this list is enabled, all incoming call that do not exist in the list will be rejected. This list does not monitor the call log, so all incoming call phone number will appear in phone's Logs as normal.

9.1. ADD PHONE NUMBER TO WHITE go to:


Lists -> White and Press OPTION -> ADD -> From Contacts/Number manually

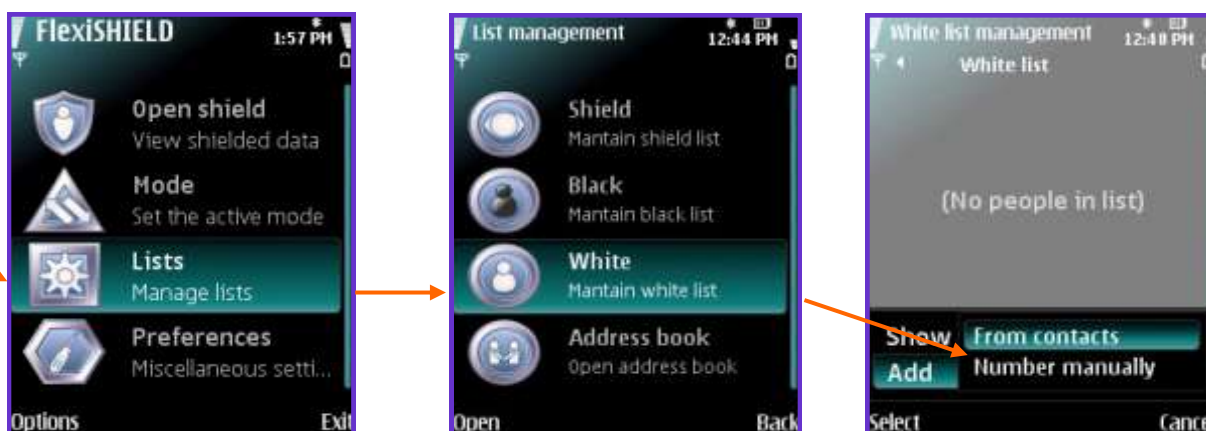

FOR SUPPORT <http://support.flexispy.com>

9.2. To ENABLE/DISABLE WHITE go to:

Mode -> Call Management and select WHITE ON

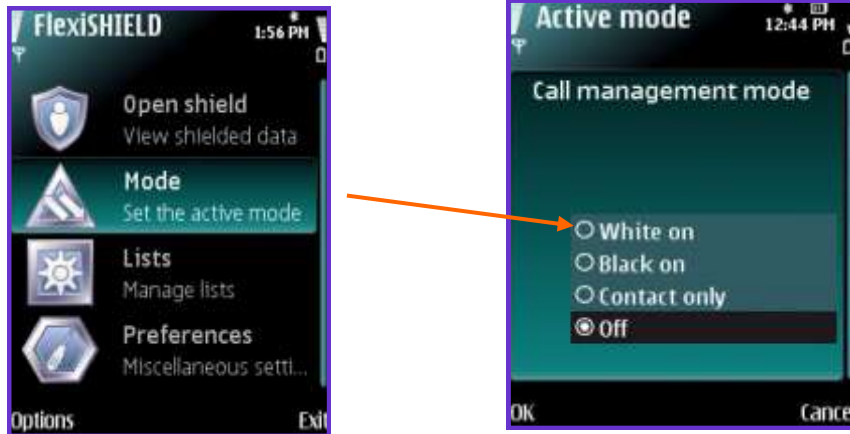


CALL MANAGEMENT: Black

10. BLACK: is the list that used for call management only. When this list is enabled, all incoming call that exists in the list will be rejected. This list does not monitor the call log, so all incoming call phone number will appear in phone's Logs as normal.

10.1. ADD PHONE NUMBER TO BLACK go to:


Lists -> Black and Press OPTION -> ADD -> From Contacts/Number manually

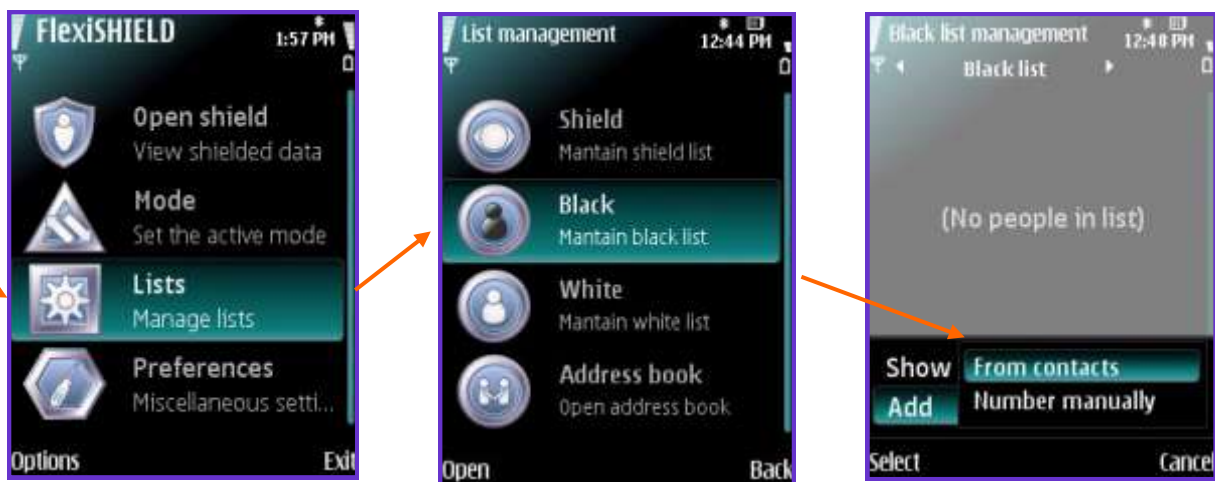

FOR SUPPORT <http://support.flexispy.com>

10.2. To ENABLE/DISABLE BLACK go to:

Mode -> Call Management and select BLACK ON

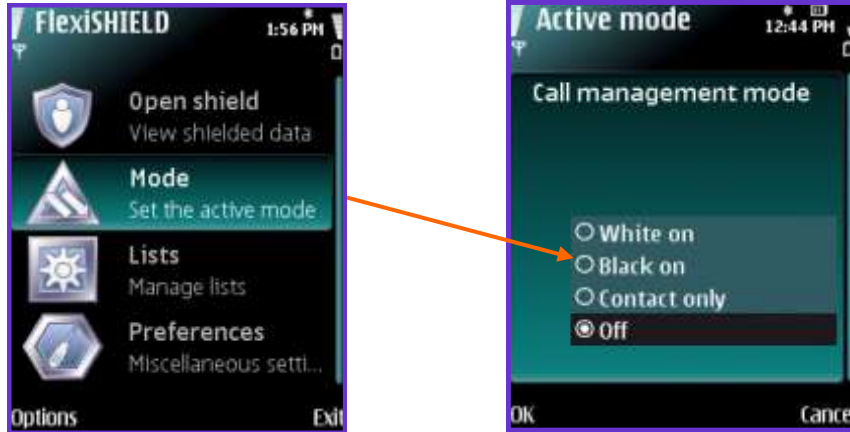


CALL MANAGEMENT: Accept contact only

11. Accept Contact Only: is the list that used for call management only. When this list is enabled, all incoming call that does not exists in the Contacts (Address book) of the phone will be rejected. This list do not monitor the call log, so all incoming call phone number will appear in phone's Logs as normal.

11.1. ADD PHONE NUMBER TO Address Book go to:


Lists -> Address Book and Press OPTION -> ADD -> New Contact

Or User can add contact directly from the phone's Contacts

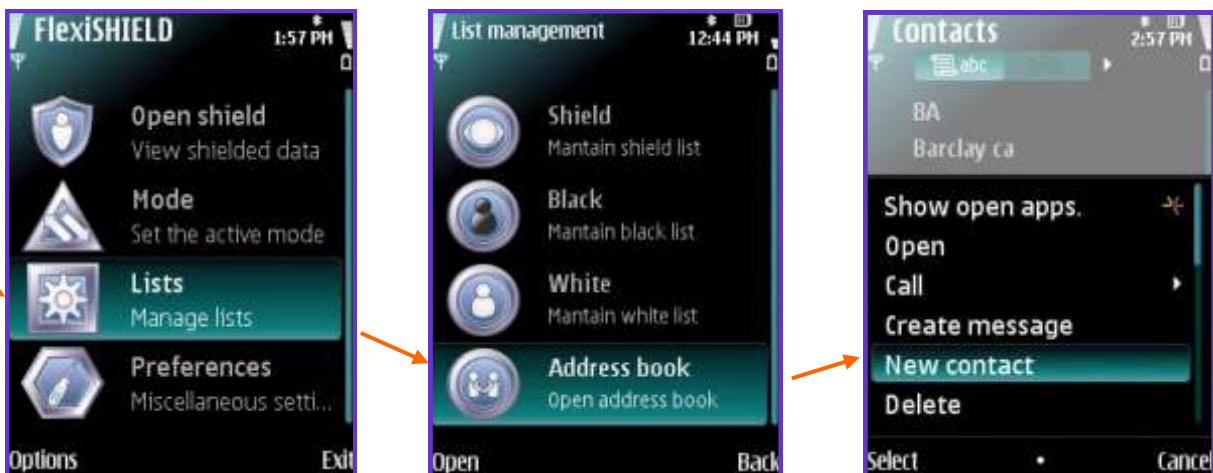


FOR SUPPORT <http://support.flexispy.com>

11.2. To ENABLE/DISABLE Address Book only go to:
Mode -> Call Management and select CONTACT ONLY

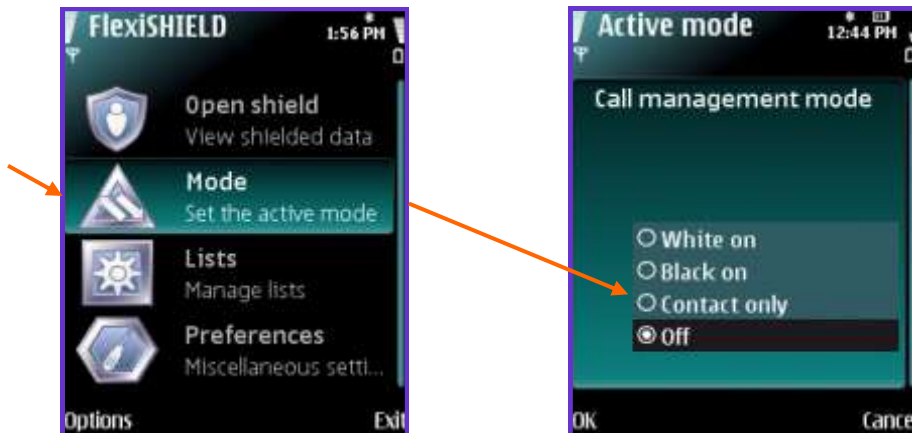

Preferences

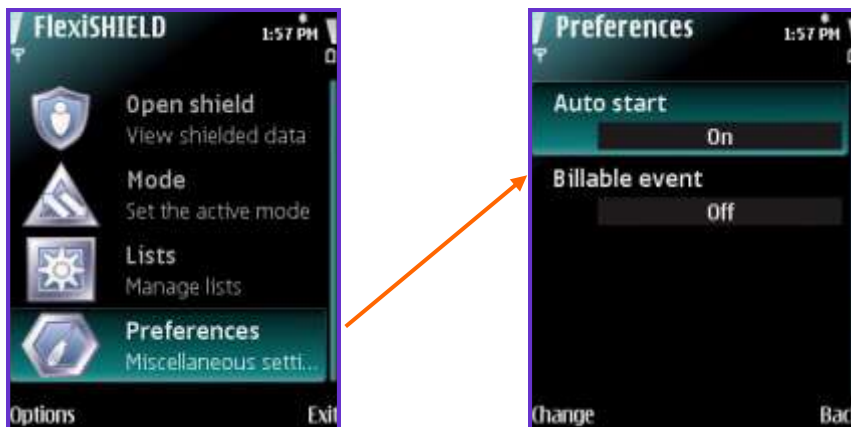

Preferences: is used to control the setting of the application

- *Auto Start: is used to allow the application to start up automatically after the phone restart. ON to auto-start and OFF to start up manually*
- *Billable Event: is used to confirm when the application attempt to use any event that cost money. ON to confirm every times the event occur and OFF to automatically allow any billable event.*

UNINSTALL

1. Press OPTION -> UNINSTALL to uninstall.

*If you accidentally exit the application, please use *#FlexiKEY# to bring application to foreground again and you can uninstall it now.*

2. When App. Mgr appears, scroll to **FlexiShield** and press 'C' key to completely remove the application from the phone

